

Original Research

Unionized Acetate Degradation at 45°C Anaerobic Digestion: Kinetics and Inhibition

Nuruol Syuhadaa Mohd^{1,2*}, Baoqiang Li², Rumana Riffat²

¹Department of Civil Engineering, University of Malaya, Lembah Pantai, Kuala Lumpur, Malaysia

²Department of Civil and Environmental Engineering, George Washington University, Washington, DC, USA

Received: 6 January 2018

Accepted: 10 February 2018

Abstract

This study demonstrated the degradation of unionized acetate in anaerobic digestion at 45°C through the identification of kinetics and inhibition parameters. The kinetic parameters, K_s and r_{max} , were determined using Monod-based model for three different conditions, namely uninhibited, inhibited, and systems with high substrate condition. The K_s values for uninhibited condition were in the range of 0.124 to 0.191 mg/L as unionized HAc. K_s value of inhibited condition were at 0.027 mg/L as unionized HAc. K_s values for systems with high substrate condition were found to be in the range of 0.237 to 0.279 mg/L as unionized HAc. As for r_{max} , a 35°C anaerobic digestion system showed the highest value at 0.166 mg/L/day – greater than the values of all 45°C systems under all experimental conditions. Additionally, the inhibition parameter K_i was also determined using the Michaelis-Menten model. The parameter was determined for inhibitory conditions resulting from high free NH_3 content. The inhibition type was uncompetitive with K_i value of 0.072 mg/L as unionized HAc. The outcomes suggested that the methanogens responsible for the digestion process at 45°C were thermo-tolerant acetate-utilizing methanogens of *Methanosarcinaceae* species, and the system will be totally inhibited with the presence of high free NH_3 content.

Keywords: 45°C anaerobic digestion, acetate metabolism, monod kinetic, kinetic constant, inhibition constant

Introduction

Numerous studies have assessed the performances of mesophilic and thermophilic anaerobic digestion systems [1-5]. Nevertheless, only a handful have investigated the feasibility of running anaerobic digesters in the intermediate zone of 45°C, between the mesophilic and thermophilic ranges. This is due

to the reason that within this intermediate zone of 40°C to 50°C, neither mesophilic nor thermophilic microorganisms would flourish, thus suppressing them from demonstrating high activity. This is because at these temperatures microorganisms are trying to adapt to the changing environment [6]. However, some researchers have found that at 45°C, their anaerobic digestion systems were still functioning well by generating a comparable amount of gas and at times were higher than the conventional mesophilic systems [7-9]. This finding was similar to observations by Gao et al., Mohd et al.,

*e-mail: n_syuhadaa@um.edu.my

and Peces et al. [10-12], who discovered that there were no major discrepancies between anaerobic digestion systems operating at 37°C and 45°C in terms of methane production, volatile solids (VS) content, and pH, except for volatile fatty acid (VFA) concentrations that increase significantly as temperatures rise [10-12].

Generally, an increase in the concentration of VFA, primarily acetate, usually indicates a failure of the anaerobic digestion process. This was mainly because acetate degradation was believed to be the rate-limiting step that brings the reaction to completion [13-14]. The degradation of acetate is a process of methane formation that undergoes either one of two mechanisms involving two different types of methanogens. The first mechanism is acetoclastic, a single-step methane fermentation carried out by acetate-utilizing methanogens such as *Methanosarcinaceae* or *Methanosaetaceae* [15-16]. The second mechanism consists of a two-step reaction in which the acetate is initially oxidized to H₂ and CO₂ prior to its final conversion to methane. This reaction is executed by acetate-oxidizing bacteria such as *Clostridium* spp., together with hydrogen-utilizing methanogens, such as *Methanomicrobiales* or *Methanobacteriales* [17-18]. As methanogens convert acetate and H₂ to methane and CO₂, it will therefore help in maintaining a low partial pressure of H₂, thus encouraging acetogenesis to proceed, and shifting the equilibrium of the reactions toward the formation of more H₂ and acetate [19]. However, if the methanogens are not present in suitable numbers, or are being slowed down by unfavorable environmental conditions, they will not utilize H₂ and acetate as rapidly as they are produced. It will then disturb balanced acetogenic processes and ultimately result in an accumulation of VFAs [19-20].

Despite the importance of acetate degradation for methane fermentation, none of the studies have elucidated the kinetics of the reaction at the intermediate temperature of 45°C. Many of the reported kinetic parameters were either from mesophilic digestion or thermophilic digestion. Aynur and Mani et al. reported K_s values of 233 and 180 mg/L as HAc in experiments with mesophilic-acclimatized sludge metabolizing acetate at 35°C, respectively [21, 22]. While Gavala et al. and Mladenovska and Ahring examined the metabolization of acetate in thermophilic sludge at 55°C and 52°C, and reported K_s of 511 and 390 mg/L as HAc, respectively [23-24].

Anaerobic digestion operating at high temperature is also susceptible to environmental influences such as pH and temperature that significantly contribute to the abundant generation of other toxic compounds such as ammonia – an essential nutrient for anaerobic microorganisms, but when available at high concentrations it can inhibit microbial activities. In aqueous phase, the fractions of ammonia, which are ammonium ion (NH₄⁺_(aq)), free ammonia (NH_{3(aq)}), and ammonia (NH_{3(g)}) exist in equilibrium with hydrogen (H⁺) and hydroxyl (OH⁻) ions. Among all, free or unionized ammonia is

reported to be the most toxic due to its capability to penetrate through the cell membrane [25-26].

Several studies have been conducted to investigate free ammonia inhibition mechanisms experienced by anaerobic digestion systems. Bai et al. in their mesophilic study reported that ammonia inhibition in anaerobic digestion showed non-competitive inhibition characteristics with a K_i reported value of 0.02 [27], while Angelidaki et al. in their study described ammonia inhibition as following a non-competitive inhibition behavior [28]. With regard to that, they reported a K_i value of 260 mg/L as HAc in their thermophilic anaerobic digestion system.

The present work was done to study the kinetics of acetate metabolism at the intermediate temperature of 45°C. Additionally, the kinetic coefficients of half saturation constant, K_s, were evaluated. In corresponding to the inhibitory condition posed by free ammonia, the inhibitory kinetics coefficient K_i was also determined. The rationale that motivates this study was that the kinetic study at this intermediate temperature was scarce and that the very limited studies that have been done had indicated its more cost-effective performance. Thus, the understanding of the kinetics of methane fermentation at this temperature is crucial, as this option is more economical, while at the same time it is able to function at the same par if not better than the conventional thermophilic digestion system.

Experimental

Anaerobic Digestion Systems

Three batch reactors were run at 45°C, 35°C, and 55°C for more than 3 years and fed with municipal sludge collected from the Blue Plains Advanced Wastewater Treatment Plant. The 45°C digester was operated at an operational volume of 15 L, organic loading rate (OLR) of 6.96 kg VS/m³/day, and solid retention time (SRT) of 7.5 days. The mesophilic digester was operated at 35°C with an operational volume of 13 L, OLR of 4.07 kg VS/m³/day, and SRT of 10 days, while the thermophilic digester was run at 55°C with an operational volume of 15 L, OLR of 5.22 kg VS/m³/day and SRT of 10 days. The characteristics of the sludge fed to the digester are presented in Table 1.

Batch Kinetic Tests

Effluent from the digesters was taken out and used as inoculations for batch kinetic tests. The characteristics of the effluent of 35°C, 45°C, and 55°C anaerobic digestion systems were presented in Table 1. However, no kinetic test was performed for the effluent of the 55°C system because of the difficulties in reducing the background acetate to a baseline level of less than 100 mg/L.

Initially, the effluent was diluted in order to remove the potential inhibition effects of existing soluble

Table 1. The characteristics of the feed, 45°C AD effluent, 35°C AD effluent, 55°C AD effluent, and baseline condition used for batch kinetic tests.

	Feed	Effluent 45°C AD	Effluent 35°C AD	Effluent 55°C AD	Baseline
pH	6.09±0.13	7.40±0.05	7.31±0.06	7.42±0.08	7.45±0.08
TS	6.64±0.65	4.14±0.40	3.31±0.35	2.16±0.24	3.54±0.29
(%) VS	5.21 ±0.50	2.64±0.21	5.07±0.58	3.53±0.38	2.20±0.20
(%) TAN (mg/L)	412±67	1559±95	1382±85	2392±221	426±33
Free NH ₃ (mg/L)	1.2±0.2	76.5±5.9	29.9±2.7	239.0±37.9	23.4±2.0
Acetate (mg/L)	1322±271	541±99	94±27	2510±209	67±10
Total VFA (mg/L)	2491±350	974±191	126±24	3944±15	67±10

AD = Anaerobic digestion; TS = Total Solids; VS = Volatile Solids; TAN = Total Ammoniacal Nitrogen; NH₃ = Ammonia; VFA = Volatile Fatty Acids

compounds such as ammonia and acetate. 400 mL of the samples were placed in 500 mL glass bottles and the substrates in a form of acetic acid were added. Following that, the headspace was flushed with nitrogen gas in order to create anaerobic condition within the bottles. The samples in the bottles were then mixed continuously using a magnetic stirrer and incubated at desired temperature. All tests were run in duplicate.

The kinetic tests were first conducted at a baseline condition at which no inhibition was observed. At baseline condition, the temperature was 45°C, pH was 7.45, total solids (TS) was 3.54%, volatile solids (VS) was 2.20%, TAN concentration was 426 mg/L, free NH₃ concentration was 23.4 mg/L, background acetate concentration was 67 mg/L, and total VFA concentration was 67 mg/L (Table 1). The condition was subsequently varied at different temperature, different SRT, different free NH₃ concentration, and different background acetate concentration. For each test, acetic acid was added as a substrate until the total concentration of acetate was approximately 1000 mg/L. Acetic acid was added in a diluted form of synthetic acetic acid 2.0 N (Fisher Chemical, Waltham, Massachusetts) while ammonia was added in a solution form of crystalline Ammonium Chloride (NH₄Cl) (Fisher Chemical, Waltham, Massachusetts). For each condition, the tests were run for at least two times, with each of them having a duplicate. During the tests, the concentrations of the remainder of the acetate were measured at every one-hour or 30-minute interval and the tests were run until all acetate was exhausted or when there was no further degradation of the acetate left in the system.

Sampling and Analysis

The concentration of acetate and total VFA were measured by a Shimadzu Gas Chromatograph Model GC-2010 (Shimadzu, Kyoto, Japan). The gas chromatography system was equipped with flame ionization detector (FID) at 250°, and Restek Stabilwaxfi-DA (Restek, Bellefonte,

Pennsylvania) capillary column with column temperature of 145°C. The calibration curves were generated using five types of organic acids, namely acetic, propionic, butyric, valeric, and caproic, with concentrations ranging from 25 to 1000 µL/L.

Prior to the analysis, the samples were centrifuged for 20 minutes at 13,000 rpm and filtered using Millipore Millex-HN filters (Fisher Scientific, Waltham, Massachusetts) with 0.45 µm pore size. The solution phase or supernatant was then acidified using phosphoric acid prior to use for analysis. The measured acetate was presented as the unionized acetate calculated according to Equation (1) [28].

$$C_{HAc} = \frac{C_{H^+} \cdot \gamma_1^2}{K_{D,Ac} + C_{H^+} \cdot \gamma_1^2} \cdot C_{Ac} \quad (1)$$

...where C_{HAc} = Concentration of unionized acetic acid (mol/L); C_{H^+} = Concentration of hydrogen ion, mol/L; C_{Ac} = Concentration of total acetic acid (mol/L); γ_1 = Monovalent ion activity coefficient = 0.73; $K_{D,Ac,35}$ = Dissociation constant at 35°C = 1.700×10^{-5} mol/L; and $K_{D,Ac,45}$ = Dissociation constant at 45°C = 1.644×10^{-5} mol/L.

pH was measured with Denver Instrument Model 250 pH meter (Denver Instrument, Bohemia, New York) while the analysis of TS, VS, and TAN were done in accordance to Standard Methods 2540 B, 2450 E, and 4500-NH₃ B and C, respectively [29].

The analysis on microbial population of the effluent was done using the PCR method. For DNA extraction, freeze-dried samples were homogenized and physically disrupted using a bead beater (BioSpec Products). DNA was extracted using the QIAamp DNA Stool Mini kit (Qiagen) following the manufacturer's instructions. DNA concentration and quality were measured by spectrophotometry corrected according to initial sample weight and dilutions. Absolute concentrations

of DNA from methanogens were determined using qPCR and serial dilutions (from 101 to 105) of specific DNA standards [30].

Kinetics Model: Monod Model

During kinetic tests, the concentrations of remaining unionized acetate, S at sampling time t was measured and the data were used to plot the unionized acetate degradation curves. The Monod-based model proposed by Smith et al. was then used to fit these curves (Equation (2)) [31].

$$t = \left[-\frac{Y}{r_{\max}} \right] \cdot \left[K_s \cdot \ln \frac{S}{S_0} + S - S_0 \right] \quad (2)$$

Where t = Sampling time (days); Y = Yield coefficient (0.035 g VSS/ g BOD [32]; r_{\max} = Maximum bacterial growth rate (mg/L.day); K_s = Half saturation constant (mg/L); S = Concentration of growth-limiting substrate (mg/L); S_0 = Initial concentration of growth-limiting substrate (mg/L).

The kinetic coefficients K_s and r_{\max} were determined by minimizing the discrepancies between t values predicted by the model and t values obtained through the experiments using the assumed value of Y and the initial estimates of K_s . This method is known as non-linear least square analysis.

Inhibition Factor I

Inhibition factor I was also determined to express the degree of inhibition caused by any particular condition. I is a ratio of the initial slope of acetate degradation curve of inhibited condition to the slope of the curve of uninhibited condition. I was expressed as I_{Temp} , I_{SRT} , I_{NH_3} , and I_{HAc} for inhibited condition caused by temperature, SRT, free NH_3 content, and background acetate concentration, respectively. I value of 1.0 represents zero inhibition.

Inhibition Kinetics Model: Michaelis-Menten Model

Based on the outcomes of the kinetics model, free NH_3 has been shown to inhibit methanogenic activity in a 45°C anaerobic digestion system, and the inhibition was classified as uncompetitive inhibitory condition [33]. The type of inhibition was determined through the trend of increasing or decreasing K_s and reaction rate at different free NH_3 concentrations. The inhibition kinetic coefficient K_I was subsequently determined using the Michaelis-Menten-based model proposed by Shuler and Kargi (Equation (3)) [34].

$$\begin{aligned} v &= \frac{dP}{dt} = -\frac{dS}{dt} = \frac{V_{m,\text{inh}} \cdot S}{K_{m,\text{inh}} + S} = \frac{\left(\frac{V_m}{1 + \frac{I}{K_I}} \right) \cdot S}{\frac{K_m}{\left(1 + \frac{I}{K_I} \right)} + S} \\ &= \frac{k \cdot S \cdot X}{\left(\frac{K_s}{\left(1 + \frac{I}{K_I} \right)} + S \right) \cdot \left(1 + \frac{I}{K_I} \right)} \end{aligned} \quad (3)$$

...where V_m = Maximum specific rate (day^{-1}); $V_{m,\text{inh}}$ = Maximum specific rate under inhibited condition (day^{-1}); K_m = Substrate utilization constant (mg/L); $K_{m,\text{inh}}$ = Substrate utilization constant under inhibited condition (mg/L); K_I = Inhibitor's dissociation constant (mg/L); I = Inhibitor concentration (mg/L).

Results and Discussion

Monod Kinetic Constants Determination: Baseline Condition

At 45°C, r_{\max} was observed to be at 0.102 mg/L and K_s was reported at 0.170 mg/L as unionized HAc or 171 mg/L as HAc (Table 2). This value was lower in comparison to the value reported by Aynur with K_s of 233 mg/L as HAc, but approximately similar to the value reported by Mani et al. at 180 mg/L as HAc [21-22]. These studies were done at 35°C and 37°C, respectively. When the comparison was made with thermophilic digestion values, much higher differences were observed. Thermophilic studies done by Gavala et al. and Mladenovska and Ahring reported K_s of 511 and

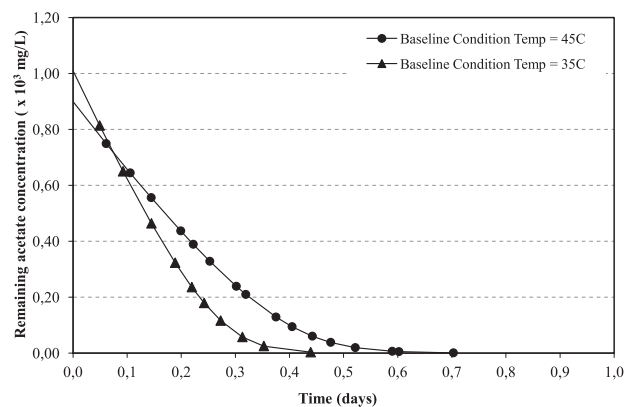


Fig. 1. Progress curve of acetate degradation at 35°C and 45°C. Different temperatures: r_{\max} (t-test, $\alpha = 0.05$, $p = 0.012$ for $\mu_{45} = \mu_{35}$), K_s (t-test, $\alpha = 0.05$, $p = 0.397$ for $\mu_{45} = \mu_{35}$).

Table 2. Model-estimated kinetic coefficients, K_s , r_{max} , and I at different temperatures, SRTs, free NH_3 contents, and background acetate concentrations.

	r_{max} (mg/L/day)	K_s (mg/L as unionized HAc)	K_s (mg/L as HAc)	I (dimensionless)
<u>Baseline</u>				
45°C Baseline	0.102	0.170	171	1.00
Different Temperature				
45°C	0.102	0.170	171	0.68
35°C	0.166	0.191	190	1.00
Different SRT				
45°C SRT 7.5 days	0.102	0.170	171	1.00
45°C SRT 10 days	0.095	0.128	130	0.94
45°C SRT 15 days	0.083	0.124	125	0.83
Different Free NH_3 Content				
45°C Free NH_3 20 mg/L	0.102	0.170	171	1.00
45°C Free NH_3 70 mg/L	0.085	0.138	139	0.94
45°C Free NH_3 90 mg/L	0.095	0.147	149	0.96
45°C Free NH_3 110 mg/L	0.044	0.027	26	0.05
Different background HAc				
45°C HAc b/g 0 + add 1000 mg/L	0.102	0.170	171	1.00
45°C HAc b/g 500 + add 1000 mg/L	0.143	0.237	237	1.36
45°C HAc b/g 1000 + add 1000 mg/L	0.128	0.279	279	1.26
45°C HAc b/g 1500 + add 1000 mg/L	0.097	0.257	257	0.98

r_{max} = Maximum bacterial growth rate; K_s = Half saturation constant; I = Inhibitor factor; HAc = Acetic Acid; SRT = Solid retention time; NH_3 = Ammonia; b/g = background; add = additional.
 Different temperature: r_{max} (t-test, $\alpha = 0.05$, $p = 0.012$ for $\mu_{45} = \mu_{35}$), K_s (t-test, $\alpha = 0.05$, $p = 0.397$ for $\mu_{45} = \mu_{35}$).
 Different SRT: r_{max} (t-test, $\alpha = 0.05$, $p = 0.187$ for $\mu_{7.5} = \mu_{10}$; $p = 0.109$ for $\mu_{7.5} = \mu_{15}$; $p = 0.281$ for $\mu_{10} = \mu_{15}$), K_s (t-test, $\alpha = 0.05$, $p = 1.515E-4$ for $\mu_{7.5} = \mu_{10}$; $p = 2.588E-4$ for $\mu_{7.5} = \mu_{15}$; $p = 0.256$ for $\mu_{10} = \mu_{15}$).
 Different Free NH_3 Content: r_{max} (t-test, $\alpha = 0.05$, $p = 0.003$ for $\mu_{20} = \mu_{110}$; $p = 0.007$ for $\mu_{70} = \mu_{110}$; $p = 0.007$ for $\mu_{90} = \mu_{110}$), K_s (t-test, $\alpha = 0.05$, $p = 1.658E-5$ for $\mu_{20} = \mu_{110}$; $p = 7.682E-3$ for $\mu_{70} = \mu_{110}$; $p = 4.257E-3$ for $\mu_{90} = \mu_{110}$).
 Different background HAc: r_{max} (t-test, $\alpha = 0.05$, $p = 0.054$ for $\mu_0 = \mu_{500}$; $p = 0.176$ for $\mu_0 = \mu_{1000}$; $p = 0.569$ for $\mu_0 = \mu_{1500}$), K_s (t-test, $\alpha = 0.05$, $p = 2.354E-3$ for $\mu_0 = \mu_{500}$; $p = 8.060E-4$ for $\mu_0 = \mu_{1000}$; $p = 1.050E-3$ for $\mu_0 = \mu_{1500}$).

390 mg/L as HAc [23-24]. These studies were done at 55°C and 52°C, respectively.

Monod Kinetic Constants Determination:
 Different Temperatures

In order to observe the implication of temperature on the digestion process, another set of tests were also conducted to the effluent of the digesters operating at 35°C and 55°C with the optimum SRT of 10 days. The comparisons were made on a basis that the optimum SRT of 45°C was 7.5 days and the optimum SRTs of 35°C and 55°C were 10 days. The other parameters that remained identical were free NH_3 concentration of approximately 20 mg/L and background acetate concentration of approximately 100 mg/L. However, the kinetic test with the effluent of 55°C digester was unsuccessful because

of the difficulties of reducing the background acetate to a baseline level of less than 100 mg/L. Fig. 1 showed the degradation rate of acetate in a 45°C system in comparison to the 35°C system. In general, methanogens in 45°C systems were able to degrade acetate to a minimum level even though the rate was slightly slower compared to those in the mesophilic system. This finding was supported by significantly less r_{max} value of 0.102 mg/L/day in 45°C systems as opposed to 0.166 mg/L/day in the mesophilic system (Table 2). Similarly, as temperature increased, K_s value also decreased. K_s value was 0.191 mg/L in the 35°C system and 0.170 mg/L in the 45°C system (Table 2). However, the variation of K_s value was insignificant. Corresponding to the declining trend of r_{max} , I_{Temp} values were also decreasing as the temperature increased, with a 32% reduction in acetate degradation

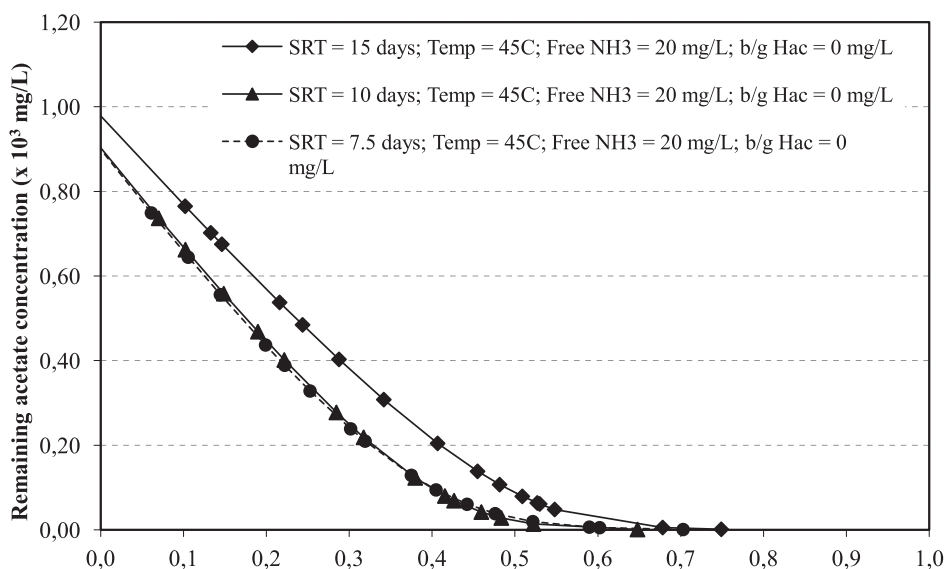


Fig. 2. Progress curve of acetate degradation at different SRTs of 7.5, 10, and 15 days (Temp = temperature; b/g = background). Different SRT: r_{\max} (t-test, $\alpha = 0.05$, $p = 0.187$ for $\mu_{7.5} = \mu_{10}$; $p = 0.109$ for $\mu_{7.5} = \mu_{15}$; $p = 0.281$ for $\mu_{10} = \mu_{15}$), K_s (t-test, $\alpha = 0.05$, $p = 1.515E-4$ for $\mu_{7.5} = \mu_{10}$; $p = 2.588E-4$ for $\mu_{7.5} = \mu_{15}$; $p = 0.256$ for $\mu_{10} = \mu_{15}$).

rate relative to the rate at mesophilic condition (Table 2).

Monod Kinetic Constants Determination: Different SRTs

Other than temperature, the kinetics of anaerobic digestion at 45°C was also compared at different SRTs of 15 days, 10 days, and 7.5 days. Correspondingly, as the SRTs were varied, the other parameters remained unchanged. Fig. 2 illustrated the degradation pattern of acetate at different SRTs. A slight reduction in degradation rate was observed as the SRT was increased and when the results were compared, a notable declining trend can be seen in K_s and r_{\max} . However, the decreasing trend was only significant in K_s but not in r_{\max} . K_s values were 0.170, 0.128, and 0.124 mg/L for a 45°C system with 7.5 days, 10 days, and 15 days SRT, respectively (Table 2). r_{\max} values were 0.102, 0.095, and 0.083 mg/L/day for a 45°C system with 7.5 days, 10 days, and 15 days each (Table 2). Apparently, the insignificant declining trend of r_{\max} suggested that increasing the SRT will only reduce 6 to 17% methane production of the digestion process at 45°C (Table 2). However, these I_{SRT} values were not low enough to be considered as inhibitory; rather, the methanogens might have been harvested beyond their capability at SRT longer than 7.5 days, thus explaining the decreasing K_s in the system with longer SRT.

Monod Kinetic Constants Determination: Different Free Ammonia Concentrations

Kinetic tests were also performed at different levels of free NH_3 of 20, 70, 90, and 110 mg/L. From Fig. 3

we observed that lower free NH_3 concentrations of 20, 70, and 90 mg/L did not have any harmful effect on acetate degradation, while higher free NH_3 concentration at 110 mg/L caused an obvious inhibition. It was also shown by the sharp decline of K_s , r_{\max} , and I_{NH_3} values as the concentration approached 110 mg/L (Table 2). A major decrease in parameter values at free NH_3 concentration of 110 mg/L was statistically significant. The K_s values were 0.170, 0.138, 0.147 and 0.027 mg/L for 45°C system with 20, 70, 90 and 110 mg/L free NH_3 , each, while r_{\max} values were 0.102, 0.085, 0.095 and 0.044 mg/L/day, respectively (Table 2). The distinctively low value of K_s and r_{\max} , coupled with almost 95% reduction in methanogenesis at free NH_3 concentration of 110 mg/L explained the non-existence of acetate degradation at high free NH_3 content (Table 2).

Monod Kinetic Constants Determination: Different Background Acetate Concentrations

As anaerobic digestion may as well suffer from existing substrate inhibition, the kinetic tests were also performed at different concentrations of background acetate, which were less than 100 mg/L, 500, 1000, and 1500 mg/L. For simplicity, tests with less than 100 mg/L acetate were labelled as 0 mg/L acetate content. For each test, 1000 mg/L acetate as acetic acid was added as additional substrate. Fig. 4 and Table 2 show that r_{\max} value was increasing as the background acetate concentration increased to 500 mg/L, and started to decrease when the concentration approached 1000 mg/L, though the rate remained either higher than or similar to the baseline test. However, the increment was insignificant. The r_{\max} values were 0.102, 0.143, 0.128, and 0.097 mg/L/day for the system with 0,

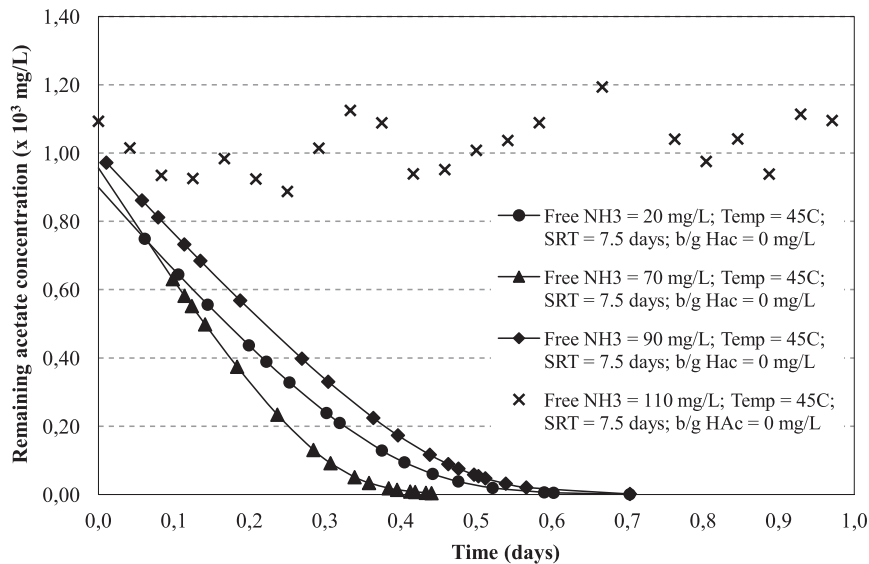


Fig. 3. Progress curve of acetate degradation at different free NH₃ concentrations of 20, 70, 90, and 110 mg/L (Temp = temperature; b/g = background).

Different Free NH₃ Content: r_{max} (t-test, $\alpha = 0.05$, $p = 0.003$ for $\mu_{20} = \mu_{110}$; $p = 0.007$ for $\mu_{70} = \mu_{110}$; $p = 0.007$ for $\mu_{90} = \mu_{110}$), K_s (t-test, $\alpha = 0.05$, $K_s: p = 1.658E-5$ for $\mu_{20} = \mu_{110}$; $p = 7.682E-3$ for $\mu_{70} = \mu_{110}$; $p = 4.257E-3$ for $\mu_{90} = \mu_{110}$).

500, 1000, and 1500 mg/L background acetate each (Table 2). The similar inclining trend before slightly declining at high concentration was also observed in K_s value. The K_s values were 0.170, 0.237, 0.279 and 0.257 mg/L for the system with 0, 500, 1000, and 1500 mg/L background acetate, respectively, and high K_s values at higher concentration were significantly higher than the baseline condition (Table 2). The increase in K_s values was mainly because at higher background acetate concentration, part of the available acetate helped supply more substrate to the system, thus increasing its

methanogenic activity. Additionally, I_{HAc} of more than 1.0 also suggested that an increase in background acetate concentration does not exert an inhibitory condition to the system.

Overall Analysis of K_s and r_{max}

K_s and r_{max} values for each condition were then plotted as shown in Fig. 5. Generally, it can be concluded that K_s values could be categorized under 3 distinct ranges. K_s values of uninhibited condition ranged

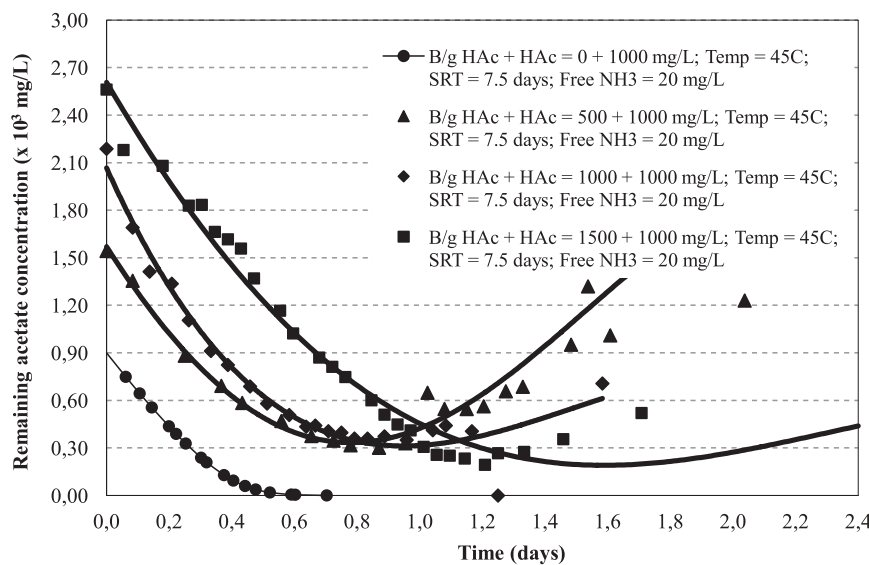


Fig. 4. Progress curve and trendline of acetate degradation at different background acetate concentrations of 0, 500, 1000, and 1500 mg/L (with the addition of synthetic acetate).

Different background HAc: r_{max} (t-test, $\alpha = 0.05$, $p = 0.054$ for $\mu_0 = \mu_{500}$; $p = 0.176$ for $\mu_0 = \mu_{1000}$; $p = 0.569$ for $\mu_0 = \mu_{1500}$), K_s (t-test, $\alpha = 0.05$, $p = 2.354E-3$ for $\mu_0 = \mu_{500}$; $p = 8.060E-4$ for $\mu_0 = \mu_{1000}$; $p = 1.050E-3$ for $\mu_0 = \mu_{1500}$).

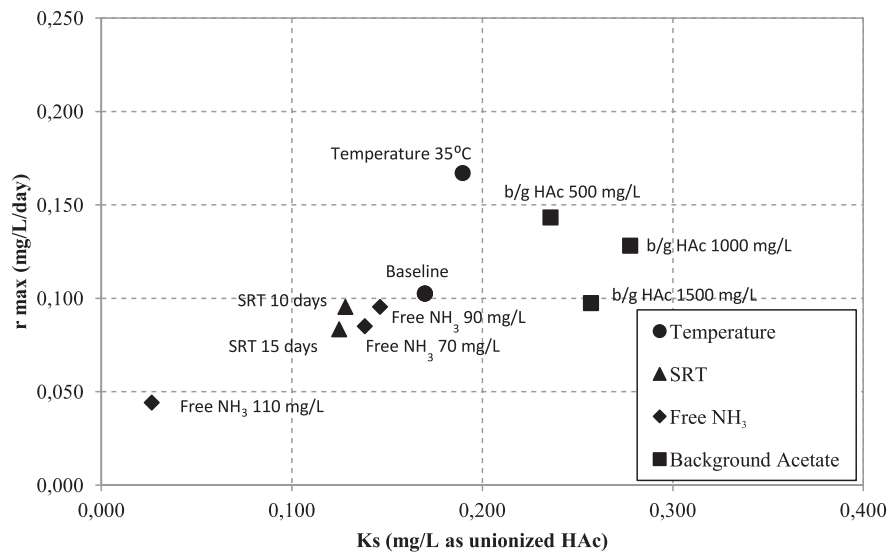


Fig. 5. K_s and r_{max} at different temperatures, SRTs, free NH_3 , and background acetates.

from 0.124 to 0.191 mg/L, with the lowest K_s in the 45°C system with 15 days SRT and the highest in the 35°C system, while K_s values of inhibited condition were at 0.027 mg/L, which was observed in the 45°C system with 110 mg/L free NH_3 . Higher K_s values were observed in systems with more substrate, ranged from 0.237 to 0.279 mg/L. For r_{max} , the highest rate was seen in the 35°C system, even exceeding the degradation rate of the 45°C system with higher substrate concentration. Thus, this implied that at 45°C the methanogens did not work at their maximum capability as the temperature was not the optimum temperature for the involved methanogens. Additionally, these observations also suggested that the methanogens in the 45°C system were similar to the ones in 35°C system. This was because of their ability to degrade acetate to a very low level, and was further supported by the significantly similar K_s values of uninhibited conditions with the value of K_s in the 35°C system (Table 2). The said methanogens were probably thermo-tolerant acetate-utilizing mesophilic methanogens. In comparison to K_s values of two prevalent mesophilic methanogens, *Methanosarcinaceae* with K_s of approximately 200 mg/L as HAc and *Methanosaetaceae* with K_s of approximately 30 mg/L as HAc, it was concluded that the methanogens of our 45°C systems belonged to *Methanosarcinaceae* type [35]. Further DNA investigation, which demonstrated that *Methanosarcinaceae* existed in significant

numbers of 82.45% in the 45°C system and 85.40% in 35°C system, ultimately confirmed the findings (Table 3).

Inhibition Kinetic Constants Determination

Free NH_3 has been shown to inhibit methanogenic activity in our 45°C anaerobic digestion system. The finding was based on the absence of acetate utilization when free NH_3 concentration reached 110 mg/L (Fig. 3). Though under normal operating conditions an ammonia-stressed environment was rarely observed, the understanding of the kinetics under inhibited condition remained crucial. As observed previously, as free NH_3 concentration increased, r_{max} and K_s values decreased substantially, showing that the system was experiencing uncompetitive inhibitory condition (Table 2). Hence, it was calculated using Equation 3, K_i value was 0.073 mg/L as unionized HAc or 72 mg/L as HAc (Table 4). In comparison to a study done by Angelidaki et al., they reported a much lower value of 260 mg/L as HAc and the ammonia inhibition experienced by their system was characterized as non-competitive inhibition [28]. As in non-competitive inhibition K_i was expected to be similar with K_s values, this explained the reason why their K_i value was similar with our K_s value rather than our K_i value. In addition, K_i is also a parameter used to represent a substrate

Table 3. Proportion of the methanogen abundance in 35°C, 45°C, and 55°C anaerobic digestion systems.

	35°C AD (%)	45°C AD (%)	55°C AD (%)
Mesophiles <i>Methanosarcinales</i>	85.44±2.05	82.47±2.02	80.67±3.68
Thermophiles <i>Methanobacteriales & Methanomicrobiales</i>	14.56±2.05	17.53±2.02	19.33±3.68

Table 4. K_i values of 45°C anaerobic digestion system.

Technique: Non-linear least square analysis Type of inhibition: Uncompetitive inhibition				
$K_{s,inhibitory}$	0.026	mg/L as unionized HAc	26	mg/L as HAc
$K_{s,uninhibitory}$	0.170	mg/L as unionized HAc	171	mg/L as HAc
K_i	0.073	mg/L as unionized HAc	72	mg/L as HAc

$K_{s,inhibitory}$ = Half saturation constant under inhibitory condition; $K_{s,uninhibitory}$ = Half saturation constant under uninhibitory condition;
 K_i = Inhibitor's dissociation constant

affinity of the methanogens. As K_s is used to represent methanogen's substrate affinity under uninhibited conditions, K_i is used to represent methanogen's substrate affinity under inhibited conditions. Furthermore, in comparison to $K_{s,inhibitory}$ of 0.026 mg/L (Table 2), K_i value of 0.072 mg/L represented methanogen's substrate affinity in any condition regardless of the free NH_3 concentration (Table 4), while $K_{s,inhibitory}$ was only applicable when free NH_3 concentration in the system is 110 mg/L.

Conclusions

Statistically similar K_s values and their ability to degrade acetate to a very low level suggests that the methanogens in the 45°C anaerobic digestion system were similar to those in the 35°C system. The methanogens were most probably thermo-tolerant acetate-utilizing methanogens from *Methanosarcinaceae* species. However, its lower r_{max} values implied that at 45°C, the methanogens did not work at their maximum capability as the temperature was not the optimum temperature for the involved methanogens. The performance was 32% reduced as the temperature rises from 35°C to 45°C. Additionally, total inhibition was observed in a 45°C anaerobic digestion system when the concentration of free NH_3 was high, with 95% reduction in acetate degradation. Other conditions such as SRT and background acetate concentration did not have a significant detrimental effect on the system.

Acknowledgements

This study was funded by a grant from USAID under the Pakistan-U.S. Science and Technology Cooperation Program, and the University of Malaya (grant No. BK023-2015). The authors gratefully appreciate the helps of the personnel of Blue Plains Advanced Wastewater Treatment Plant in Washington, D.C., for providing the sludge for the anaerobic digestion system used in the study.

References

1. INCE E., INCE M., ONKAL E.G. Comparison of thermophilic and mesophilic anaerobic treatments for potato processing wastewater using a contact reactor. *Global NEST Journal*. **19** (2), 318, **2017**.
2. LABATUT R.A., ANGENENT L.T., SCOTT N.R. Conventional mesophilic vs. thermophilic anaerobic digestion: A trade-off between performance and stability? *Water Res.* **53**, 249, **2014**.
3. LIU C., WANG W., ANWAR N., MA Z., LIU G., ZHANG R. Effect of organic loading rate on anaerobic digestion of food waste under mesophilic and thermophilic conditions. *Energy Fuels*. **31**, 2976, **2017**.
4. MANERAT K., BOONYARIT, N., SOMKIET, T., CHANTARAPOM, P. Comparative mesophilic and thermophilic anaerobic digestion of palm oil mill effluent using upflow anaerobic sludge blanket. *Water Environ. Res.* **84** (7), 577, **2012**.
5. MOSET V., POULSEN M., WAHID R., HOJBERG O., MOLLER H.B. Mesophilic versus thermophilic anaerobic digestion of cattle manure: Methane productivity and microbial ecology. *Microbial Biotechnology*. **8** (5), 787, **2015**.
6. GERARDI M.H. *The microbiology of anaerobic digesters*, John Wiley: Hoboken, NJ, USA, **2003**.
7. KAMALI M., GAMEIRO T., COSTA M.E.V., CAPELA I. Anaerobic digestion of pulp and paper mill wastes – An overview of the development and improvement opportunities. *Chemical Engineering Journal*. **298**, 162, **2016**.
8. WANG X., LU X., LI F., YANG G. Effects of temperature and C/N ratio on the performance of anaerobic co-digestion of dairy manure, chicken manure and rice straw: Focusing on ammonia inhibition. *PLoS ONE*. **9** (5), e97265, **2014**.
9. YAN Z., SONG Z., LI D., YUAN Y., LIU X., ZHENG T. The effects of initial substrate concentration, C/N ratio, and temperature on solid state anaerobic digestion from composting rice straw. *Bioresource Technol.* **177**, 266, **2015**.
10. GAO W.J., LEUNG K.T., QIN W.S., LIAO B.Q. Effects of temperature and temperature shock on the performance and microbial community structure of a submerged anaerobic membrane bioreactor. *Bioresource Technol.* **102**, 8733, **2011**.
11. MOHD N.S., HUSNAIN T., LI B., RAHMAN A., RIFFAT R. Investigation of the performance and kinetics of anaerobic digestion at 45°C. *Journal of Water Resource and Protection*. **7**, 1099, **2015**.

12. PECES M., ASTALS S., MATA-ALVAREZ J. Response of a sewage sludge mesophilic anaerobic digester to short and long-term thermophilic temperature fluctuations. *Chemical Engineering Journal*. **233**, 109, **2013**.
13. APPELS L., BAEYENS J., DEGREVE J., DEWIL R. Principles and potential of the anaerobic digestion of waste-activated sludge. *Process in Energy and Combustion Science*. **34** (6), 755, **2008**.
14. KARAKASHEV D., BATSTONE D.J., TRABLY E., ANGELIDAKI I. Acetate oxidation is the dominant methanogenic pathway from acetate in the absence of *Methanosaetaceae*. *Appl. Env. Microb.* **72** (7), 5138, **2006**.
15. FOTODIS I.A., KARAKASHEV D., ANGELIDAKI I. The dominant acetate degradation pathway/methanogenic composition in full-scale anaerobic digesters operating under different ammonia levels. *Int. J. Environ. Sci. Technol.* **11**, 2087, **2014**.
16. FRANKE-WHITTLE I.H., WALTER A., EBNER C., INSAM H. Investigation into the effect of high concentrations of volatile fatty acids in anaerobic digestion on methanogenic communities. *Waste Management*. **34**, 2080, **2014**.
17. VRIEZE J.D., SAUNDERS A.M., HE Y., FANG J., NIELSEN P.H., VERSTRAETE W., BOON N. Ammonia and temperature determine potential clustering in the anaerobic digestion microbiome. *Water Research*. **75**, 312, **2015**.
18. WANG H., FOTODIS I.A., ANGELIDAKI I. Ammonia effect on hydrogenotrophic methanogens and syntrophic acetate-oxidizing bacteria. *FEMS Microbiol. Ecol.* **91**, fiv130, **2015**.
19. METCALF and EDDY. *Wastewater engineering: Treatment and reuse*, 4th ed.; Mc-Graw Hill: New York, NY, USA, **2003**.
20. MCCARTY P.L. *Anaerobic waste treatment fundamentals – Part two – Environmental requirements and control*. *Public Work*, **95** (9), 123, **1964**.
21. AYNUR S.K. *Evaluation of enhanced digestion processes for treatment of municipal sludge and pathogen removal*, PhD Thesis, George Washington University: Washington, DC, USA, **2011**.
22. MANI S., SUNDARAM J., DAS K.C. *Process simulation and modelling: Anaerobic digestion of complex organic matter*. *Biomass Bioenergy*. **93**, 158, **2016**.
23. GAVALA H.N., YENAL U., SKIADAS I.V., WESTERMANN P., AHRING B.K. Mesophilic and thermophilic anaerobic digestion of primary and secondary sludge: Effect of pre-treatment at elevated temperature. *Water Research*. **37**, 4561, **2003**.
24. MLADENOVSKA Z., AHRING B.K. Growth kinetics of thermophilic *Methanosarcina* spp. isolated from full-scale biogas plants treating animal manures. *FEMS Microbiology Ecology*. **31**, 225, **2000**.
25. RAJAGOPAL R., MASSE, D.I., SINGH, G. A critical review of inhibition of anaerobic digestion process by excess ammonia. *Bioresource Technology*. **143**, 632, **2013**.
26. YENIGUN O., DEMIREL B. Ammonia inhibition in anaerobic digestion: A Review. *Process Biochemistry*. **48**, 901, **2013**.
27. BAI J., LIU H., YIN B., MA H., CHEN X. Modified ADM1 for modelling free ammonia inhibition in anaerobic acidogenic fermentation with high-solid sludge. **52**, 58, **2017**.
28. ANGELIDAKI I., ELLEGAARD L., AHRING B.K. A mathematical model for dynamic simulation of anaerobic digestion of complex substrates: Focusing on ammonia inhibition, *Biotechnology and Bioengineering*. **42**, 159, **1993**.
29. JORDENING H.J., WINTER J. *Environmental biotechnology: Concepts & application*, Wiley: Weinheim, Germany, **2005**.
30. AMERICAN PUBLIC HEALTH ASSOCIATION. *Standard methods for the examination of water and wastewater*, 21st ed.; American Public Health Association: Washington, DC, USA, **2005**.
31. BELANCHE A., DOREAU, M., EDWARDS, J.E., MOORBY, J.M., PINLOCHE E., NEWBOLD, C.J. Shifts in the rumen microbiota due to the type of carbohydrate and level of protein ingested by dairy cattle are associated with changes in rumen fermentation. *J Nutr.* **142**, 1684, **2002**.
32. SMITH H.S., MCCARTY P.L., KITANIDIS P.K. Spreadsheet method for evaluation of biochemical reaction rate coefficients and their uncertainties by weighted nonlinear least-squares analysis of the integrated Monod equation. *Appl. Environ. Microbiol.* **64** (6), 2044, **1998**.
33. RITTMAN B.E., MCCARTY P.L. *Environmental biotechnology: Principles and applications*, McGraw Hill: New York, NY, USA, **2000**.
34. MOHD N.S. *Feasibility of anaerobic digestion at 45°C*, PhD Thesis, George Washington University: Washington, DC, USA, **2015**.
35. SHULER M.L., KARGI F. *Bioprocess engineering basic concepts*, Prentice Hall: Englewood Cliffs, NJ, USA, **2002**.
36. SPEECE R.E. *Anaerobic biotechnology and odor/corrosion control for municipalities and industries*, Archae Press: Nashville, TN, USA, **2008**.