

Original Research

Assessing Exposure Hazards and Metal Analysis Resulting from Bauxite Samples Collected from a Saudi Arabian Mine

Saleh Alashrah^{1*}, Atef El-Taher²

¹Physics Department, College of Science, Qassim University, Buridah 51452, Kingdom of Saudi Arabia

²Physics Department, Faculty of Science, Al-Azhar University, Assuit 71452, Egypt

Received: 12 April 2017

Accepted: 31 June 2017

Abstract

Since bauxite is a rock consisting of aluminum oxide, it is significant to measure natural radionuclide concentrations for occupational health purposes. The bauxite mine is located in the city of Az Zabirah in the Qassim region in Saudi Arabia. The radionuclide concentrations of ²²⁶Ra, ²³²Th, and ⁴⁰K in bauxite samples were measured using a γ -ray spectrometer NaI (Tl). The average and range values of ²²⁶Ra, ²³²Th, and ⁴⁰K radioactivity concentrations were 83.7 ± 0.3 (164.2-35.2), 107.3 ± 1.3 (199.9-48.5), and 192.0 ± 1.1 (487.1-24.6), Bq/kg respectively. These results were compared with published global limits of ²²⁶Ra, ²³²Th, and ⁴⁰K by (UNSCEAR, 2000; ICRP-60). The radiation hazard parameters were also calculated and compared with the recommended levels. There are no studies for the natural radioactivity in the bauxite mine in Az Zabirah, so these results are a start to establishing a database in this location. Furthermore, x-ray fluorescence (XRF) was used to determine the concentrations of elements and their oxides for the bauxite samples.

Keywords: bauxite, natural radioactivity, radiation hazard parameters

Introduction

Natural occurring radionuclides are present in many natural resources. Human activities may enhance concentrations of radionuclides and/or enhance potential exposure to naturally occurring radioactive material (NORM). Industrial residues containing radionuclides have been receiving considerable global attention because of the large amounts of NORM-containing wastes and the potential long-term risks of long-lived radionuclides [1]. They have become concentrated and exposed not only to

the environment but also to mine workers. Actually, there are a number of authors who have published papers about radiation hazard assessment resulting from phosphate, oil, or gas production [2]. Although aluminum has been widely used in industry, there are few studies focusing on radiation risk from bauxite or red mud [3]. Table 1 shows the range of radionuclides concentrations in bauxite. The activity concentrations of ²³⁸U and ²³²Th were high because ²³⁸U and ²³²Th decay series depends on geological composition.

O'Connor [4-5] measured natural activity concentrations in bauxite, solid residues, and red mud resulting from alumina production in western Australia. ²³⁸U concentration results were 120-350

*e-mail: salashra@gmail.com

Table 1. Content of radionuclides in bauxite and red mud [9].

Radionuclide	Specific activity (Bq/Kg)	
	Bauxite	Red mud
^{238}U - ^{226}Ra decay series	10-900	100-3,000
^{232}Th decay series	35-1,400	100-300
^{40}K	10-600	10-100

(bauxite), 5-200 (soil residues), and 150-600 (red mud). Furthermore, the activity concentrations of ^{232}Th were (450-1,050), (300-800) and (1,000-1,900) for bauxite, soil residues, and red mud, respectively. Radionuclide concentrations of red mud increase three times compared to the original bauxite mineral due to refined bauxite and produce alumina. The highest concentrations of uranium or thorium radionuclides are transferred to solid waste. However, little, if none, of their radionuclides are found in alumina. To reduce occupational exposure, many studies have reported that a percentage of red mud can be mixed with concrete or cement [6]. The absorbed dose of the mixed red mud should not exceed the limit determined by UNSCEAR (2000) [7]. Therefore, manufacturing operation reduces the radiation hazard parameters. Furthermore, Righi et al. [8] measured the natural radioactivity in bauxite. Their results showed that the activity concentrations of ^{238}U were between 500 and 600 Bq/kg and from 400 to 450 Bq/kg for ^{232}Th .

Ademola et al. [10] studied the activity concentration of ^{226}Ra , ^{232}Th , and ^{40}K in bauxite ore in Nigeria using a NaI(Tl) detector. They concluded that the mean values of ^{226}Ra , ^{232}Th , and ^{40}K changed from 47 ± 14 to 134 ± 21 . When high pure germanium and neutron activation methods were used for bauxite measurement, the results were $37 \pm 12 \text{ Bq.kg}^{-1}$ for ^{238}U , $154 \pm 16 \text{ Bq.kg}^{-1}$ for ^{232}Th , and 9.4 ± 0.2 for ^{40}K [1]. The activity concentrations of bauxite samples in the Gulf of Corinth in Greece were determined using direct γ -ray spectroscopy [11]. The results showed that the activity concentrations of ^{226}Ra , ^{232}Th , and ^{40}K were 150, 205, and 38, respectively. The average world activity concentrations of ^{226}Ra , ^{232}Th , and ^{40}K were 50, 50, and 500 Bq/Kg, respectively [7].

Regarding EDXRF, Yatkin et al. [12] compared the results of energy dispersive x-ray fluorescence (EDXRF) and inductively coupled plasma mass spectrometry (ICP-MS) for element concentrations in bauxite. These elements were lead (Pb), arsenic (As), nickel (Ni), cadmium (Cd), copper (Cu), chromium (Cr), and zinc (Zn). Other elements such as aluminum (Al), calcium (Ca), iron (Fe), magnesium (Mg), silicon (Si), chloride (Cl), potassium (K), sulphur (S), manganese (Mn), molybdenum (Mo), cobalt (Co), strontium (Sr), bromide (Br), titanium (Ti), tin (Sn), and antimony (Sb) were also tested. They concluded that there was good agreement in element analysis between ICP-MS and EDXRF for most elements, and the uncertainty in element concentrations was low.

The objective of the present work is to determine Al content in the bauxite mine in Az Zabirah using ARL Quant'X (Thermo Scientific Inc, USA) EDXRF and compare our results with similar studies in other countries. Furthermore, this study aims to measure the natural radioactivity levels of ^{226}Ra , ^{232}Th , and ^{40}K in the samples using γ -ray spectrometry and calculate the radiation hazard parameters such as radium equivalent activity (Raeq), external hazard index (Hex), and absorbed dose rate.

Experimental

Study Area

Az Zabirah (N27056', E43043') is located in the northeastern Qassim region (Fig. 1) [13], and it has a bauxite mine. It has a laterite profile because it is rich in iron and aluminum. It is more than 105 km into the scarp face of an early Cretaceous feature. The estimated total reserves are 101.8 million tons. Of course, the laterite development could be older than Oligocene. The thickness of bauxite is approximately 8.5 m described [13]. Az Zabirah is in the cuesta region of central Saudi Arabia.

Sampling and Sample Preparation

Forty samples of the bauxite were collected from Az Ziberah in the Qassim region. The samples were ground and sieved using a standard set of sieves. Weighed samples were put in polyethylene bottles of 350 cm³ volume. The bottles were completely sealed for more than one month to allow radioactive equilibrium to be reached. This step was necessary to ensure that radon was removed from the volume [14-16]. Each powdered sample was homogenized using an electric shaker [17].



Fig. 1. Location of Az Zabirah in Saudi Arabia.

γ -ray Spectrometer NaI(Tl)

A NaI(Tl) detector was used to measure natural radionuclide activity. It was calibrated using a known source such as ^{60}Co and ^{137}Cs point sources. In order to calculate radionuclide activity, the concentration for each gamma-ray photo-peak relies on the secular equilibrium between parents and daughters in the samples:

$$A = \frac{N_p \times 100}{e \times \eta \times m} \quad (1)$$

...where N_p is the net count rate (cps), e is the abundance of the γ -peak in a radionuclide, m is the mass of sample, and η is the measured efficiency for each gamma-ray peak observed for the same number of channels.

The count rate was subtracted from an empty polystyrene container using the same manner as measured samples to obtain the net count rate. The values of e and η for each isotope used to calculate the activity concentrations of ^{226}Ra , ^{232}Th , and ^{40}K are shown in Table 2. The measuring time for gamma-ray spectra was 43,200 s [15, 18-22].

X-ray Fluorescence (XRF)

We used an ARL Quant'X (EDXRF) manufactured by Thermo Scientific Inc, USA for elemental analysis. It can analyze elements ranging from ^{22}Na to heavy elements such as ^{238}U . A material can be excited when it collides with high-energy x-rays. The anode material of an x-ray tube consists of rhodium (whose symbol is Rh and atomic number 45), and the voltage changes between 4 and 50 kV. The detector is made from semiconductor Si(Li) material. It is a cylindrical shape with 15 mm² cylindrical area and 3.5 mm cylindrical depth. Table 3 shows a list of filters used to decrease the x-ray energy to the correct excitation bandwidth of the elements to be analyzed [12].

Table 3. Operational parameters of EDXRF.

Beam filter	Beam filter	Live time (sec)	Element
Cu thick	50	240	Sn, Sb
Cu thin	50	800	Mo, Cd
Pd thick	30	1,600	As, Br, Sr, Pb
Pd medium	20	960	Cu, Zn
Pd thin	16	600	Fe, Co, Ni, Mn
Aluminum	12	1,000	Ti, V, Cr
Cellulose	8	200	S, Cl, K, Ca
No filter	4	100	Mg, Al, Si

Results and Discussion

Activity Concentrations of ^{226}Ra , ^{232}Th , and ^{40}K

The activity concentrations of ^{226}Ra , ^{232}Th , and ^{40}K in the bauxite samples in Az Zabirah are shown in Table 4. According to the recommended reference level [7], the activity concentration should be less than 50, 50, and 500 Bq/kg for ^{226}Ra , ^{232}Th , and ^{40}K , respectively. The average values of ^{226}Ra and ^{232}Th in the bauxite samples were higher than the recommended reference level (Table 4). However, the activity concentrations of ^{40}K were lower than the recommended reference level [7]. Table 5 shows the comparison between the activity concentrations of ^{226}Ra , ^{232}Th , and ^{40}K in the bauxite samples in this study with those by other investigations in different locations around the world. The average value of ^{226}Ra in this study was higher than the average value of ^{226}Ra measured in India, Guinean, the Gulf of Itea in Greece, and Brazil. However, our result was lower than for Greece, Antikyra Bay, Hungary, China, and Turkey. Regarding the result of ^{232}Th , our result was lower than all countries. However, ^{40}K was the highest value. Figure 2 illustrates the correlations between ^{226}Ra , ^{232}Th , and ^{40}K . We noted good correlation between ^{226}Ra and ^{232}Th and between ^{226}Ra and ^{40}K , with correlation coefficients of 0.99 and 0.95, respectively.

Table 2. Gamma rays and their related isotopes used to calculate the activity concentrations of ^{226}Ra , ^{232}Th , and ^{40}K .

Nuclide	Isotopes	Energy (KeV)	Measured efficiency for each gamma-ray peak (η) (%)	Abundance of γ -peak in a radionuclide (e)
^{226}Ra	^{214}Pb	351.90	37	0.21
	^{214}Bi	609.30	46	0.12
	^{214}Bi	1,120.30	15	0.08
	^{214}Bi	1,764.5	15.9	0.067
^{232}Th	^{228}Ac	911.10	29	0.09
	^{212}Pb	238.60	44	0.25
^{40}K	^{40}K	1,460.00	11	0.07

Table 4. Activity concentrations (²²⁶Ra, ²³²Th, and ⁴⁰K) in the bauxite samples in the study area.

Sample number	Activity concentrations		
	²²⁶ Ra	²³² Th	⁴⁰ K
1	37.2	54.1	30.0
2	35.4	52.2	30.1
3	35.4	50.7	24.6
4	42.3	58.9	35.0
5	49.5	70.1	46.8
6	45.9	62.6	44.9
7	53.7	73.5	51.1
8	52.1	72.5	50.2
9	45.1	64.6	59.0
10	77.9	112.9	96.4
11	61.4	84.6	52.6
12	65.6	95.4	71.0
13	61.3	86.2	77.8
14	60.7	84.5	67.3
15	51.2	71.0	62.8
16	58.4	80.7	84.5
17	56.8	77.5	84.3
18	152.2	178.2	444.5
19	139.4	166.1	419.5
20	159.4	199.9	443.7
21	148.4	178.1	423.2
23	164.2	197.2	487.1
24	161.2	198.1	460.6
25	103.3	127.6	298.2
26	101.9	124.5	288.9
27	40.6	54.9	74.1
28	51.9	67.2	92.6
29	35.3	48.5	61.8
30	54.5	75.6	96.2
31	54.8	74.0	101.8
32	161.5	198.4	461.3
33	104.1	128.4	168.4
34	100.7	123.9	292.6
35	99.1	120.9	283.6
36	81.2	97.6	233.6
37	86.4	105.1	245.1
38	88.1	106.9	286.1
39	139.0	169.3	409.9
40	148.0	191.3	446.0
Average	83.7	107.3	192.0

Radiation hazard parameters can be estimated using indices such as radium equivalent, absorbed dose, and the annual effective dose. The distribution of ²²⁶Ra, ²³²Th, and ⁴⁰K in samples are not uniform. To obtain the same gamma dose rate, the activity concentration from the three radionuclides are assumed to be 370 Bq·kg⁻¹ from ²²⁶Ra, 259 Bq·kg⁻¹ from ²³²Th, and 4810 Bq·kg⁻¹ from ⁴⁰K. This is the definition of radium equivalent and is given as Equation 2:

$$Ra_{eq} = A_{Ra} + 1.43 \times A_{Th} + 0.077 \times A_K \quad (2)$$

...where A_{Ra}, A_{Th}, and A_K are the activity concentrations of ²²⁶Ra, ²³²Th, and ⁴⁰K in Bq·kg⁻¹, respectively. Regarding radiological hazard, the maximum Raeq in the bauxite samples must be less than 370 Bq kg⁻¹ for safe use. The calculated Raeq results obtained from bauxite samples are presented in Fig. 3a). The radium equivalent results ranged from 109.4±10 to 483.8 ±34 Bq·kg⁻¹, and mean value was 251.9. The average value was in the safety recommended limit. These results were comparable with the results obtained from bauxite in Nigeria (189-262 Bq·kg⁻¹ with mean value 222 Bq·kg⁻¹) [17]. Furthermore, the absorbed dose rate in air at 1 m above the ground surface was calculated at different sampling points using Equation 3:

$$D_R \text{ (nG h}^{-1}\text{)} = 0.427A_{Ra} + 0.623A_{Th} + 0.043A_K \quad (3)$$

The values varied from 48.0 to 215.3 nGy/h and the average value was 111.5 nGy/h in the Az Zabirah bauxite mine as shown in Fig. 3a). The average obtained value calculated based on Equation (3) was higher than the worldwide average value of 60.0 nGy/h [7]. The average effective dose value at which populations are exposed to gamma rays in the Az Zabirah mine was 0.14 mSv/year. The obtained average value was lower than the recommended level (1.0 mSv/year) [7]. The calculation value of the absorbed dose rate in air at 1 m above ground level and the annual effective dose to which a population may likely be exposed at different sampling

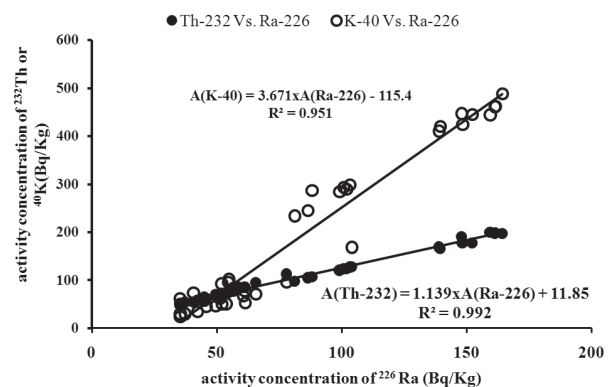


Fig. 2. Correlations between ²²⁶Ra and ²³²Th (●) and ²²⁶Ra and ⁴⁰K (○) in the bauxite samples in Qassim Province, Saudi Arabia.

Table 5. Comparison of natural radioactivity concentrations of ²²⁶Ra, ²³²Th, and ⁴⁰K in the bauxite samples between the present study and published papers in other countries around the world.

Country	Description	Activity concentration (Bqkg ⁻¹)			References
		²²⁶ Ra	²³² Th	⁴⁰ K	
Saudi Arabia, Az Zabirah	bauxite	83.7	107.3	192.0	Present study
Guinea	Bauxite	51.2	227	-----	[23]
India	Bauxite	70.2	499	----	[23]
Brazil	Bauxite	64	154	9.4	[1]
Greece, Gulf of Itea	Bauxite	72.8	185	43	[24]
Greece, Antikyra Bay	Bauxite	150	205	28.3	[11]
Hungary	Bauxite	419.0	256.0	47.0	[25]
China	Bauxite	370.0	400.0	63.0	[8]
Turkey	Bauxite	15.5-405	19.9-414	12.8-111.6	[26]

points in these study sites are shown in Fig. 4. The hazard index parameters calculated to assess the level of risk to which the population may be exposed to the terrestrial radiation from bauxite are shown in Fig. 3b). The obtained average values of the external hazard index (Hex) and the internal hazard index (Hin) were 0.7

and 0.9, respectively. The obtained average values of both hazard indices were lower than the recommended level [7].

Chemical Analysis by EDXRF

Energy dispersive x-ray fluorescence analysis (ARL Quant'X EDXRF) was used to determine major and minor element concentrations and their oxides in the bauxite samples as shown in Table 6. Aluminum oxide (Al₂O₃) was the highest value, ranging between 63.3% and 40%, and the average percentage value was 56.7%. This result agrees with other studies [27-28]. Impurities, humidity, and location from which the bauxite was mined have a significant effect on the element's composition [3].

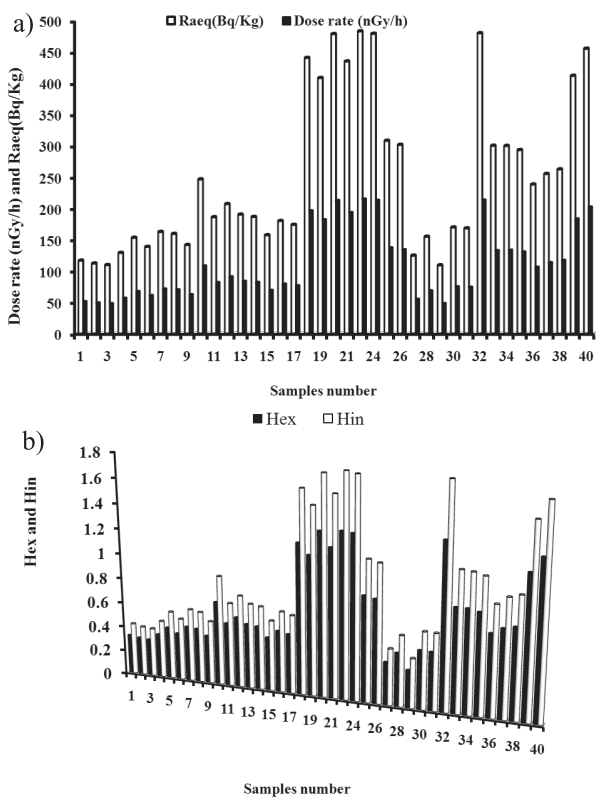


Fig. 3. a) Air-absorbed dose rates and radium equivalent calculated for bauxite samples collected from Az Zabirah in Qassim Province and b) calculated hazard index parameters, external index (Hex), and internal index (Hin) collected from the mine.

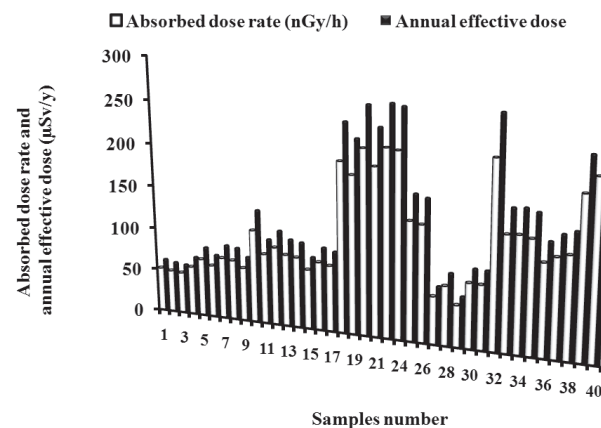


Fig. 4. Air-absorbed dose rates and annual effective doses calculated for the bauxite mine samples collected from Az Zabirah in Qassim Province.

Table 6. Chemical composition of bauxite samples collected from Az Zabirah mine in Qassim Province, Saudi Arabia.

Sample number	Element oxide (%)												
	Al ₂ O ₃	SiO ₂	TiO ₂	Fe ₂ O ₃	Na ₂ O	MgO	SO ₃	CaO	ZrO ₂	SrO	Cr ₂ O ₃	MnO	Nb ₂ O ₅
1	40,1	39.8	4.5	2.6	---	7.7	3.0	1.6	0.4	0.02	0.02	0.01	0.03
2	40.8	38.1	4.7	3.0	---	8.2	3.1	1.7	0.4	0.03	0.02	0.02	0.03
3	58.7	26.1	5.2	6.1	---	---	2.3	0.7	0.5	0.3	0.06	0.04	0.04
4	63.0	25.0	4.3	4.8	---	1.9	1.0	0.5	0.4	0.1	---	0.03	0.03
5	42.1	31.0	2.9	2.1	11.2	7.7	1.6	1.0	0.3	0.05	----	0.01	0.02
6	27.4	25.9	3.0	1.8	32.6	5.4	2.3	1.3	0.3	0.02	----	---	0.01
7	57.0	24.8	5.0	7.1	---	2.0	2.5	0.6	0.6	0.3	---	---	0.05
8	63.3	22.2	6.7	4.1	----	----	----	2.5	0.9	0.07	0.05	0.03	0.04
9	62.3	25.8	4.6	4.5	----	1.7	----	0.4	0.5	0.1	----	0.02	0.03
10	58.6	20.3	5.9	3.2	7.0	1.8	----	1.9	0.8	0.05	----	0.02	0.03
11	55.5	26.0	4.1	3.7	4.8	1.7	2.1	1.4	0.4	0.1	0.04	0.02	0.03
12	59.0	22.3	3.6	3.7	7.8	1.6	1.0	0.4	0.3	0.08	0.04	0.02	0.02
13	57.5	27.5	4.6	4.0	----	2.0	----	1.5	0.5	0.15	0.04	0.03	0.03
14	56.2	23.9	4.2	4.6	6.6	1.7	1.4	0.6	0.4	0.2	0.05	0.02	0.03
16	61.6	25.1	4.9	5.5	----	----	1.7	0.5	0.4	0.2	0.05	0.03	0.04
17	56.6	25.2	3.9	3.0	6.1	1.8	1.3	1.4	0.5	0.1	0.04	0.03	----
18	61.9	24.7	4.4	5.1	----	1.7	1.1	0.5	0.4	0.2	----	0.03	0.03
19	58.0	31.0	4.3	2.9	----	1.7	1.2	0.4	0.4	0.1	0.03	----	0.03
20	60.0	28.8	3.7	4.7	----	1.9	---	0.3	0.3	0.06	----	0.03	0.02
21	61.8	23.6	4.9	3.6	----	1.9	1.5	1.7	0.6	0.3	----	----	0.03
22	58.8	21.5	3.8	4.2	7.7	1.7	1.4	0.4	0.3	0.08	----	0.02	0.02
23	60.7	26.5	4.7	5.3	----	----	1.6	0.6	0.4	0.2	0.04	0.03	0.03
24	60.5	28.7	4.8	3.9	----	----	----	1.4	0.6	----	----	0.03	0.04
25	40.8	35.6	3.8	2.2	5.1	8.2	2.5	1.4	0.3	0.0	0.0	----	0.0
26	58.5	26.3	4.7	6.3	----	----	2.8	0.6	0.4	0.2	----	0.0	----
27	42.1	34.1	4.0	2.4	4.6	8.3	2.4	1.7	0.3	0.0	----	0.0	0.0
28	59.0	27.1	4.9	5.4	----	----	2.2	0.6	0.5	0.2	0.0	----	0.0
29	60.4	20.1	5.3	3.2	6.1	2.1	----	1.9	0.7	----	0.0	0.0	0.0
30	60.4	23.6	3.7	3.6	6.3	1.5	----	0.3	0.3	0.1	0.0	----	0.0
31	59.8	22.2	3.8	3.4	8.0	1.8	----	0.5	0.3	0.1	----	0.0	0.0
32	42.7	32.9	3.6	3.2	14.3	----	1.9	0.9	0.3	0.1	----	----	0.0
33	61.9	24.4	6.8	3.6	----	----	----	2.3	0.9	0.1	----	0.0	0.0
34	57.7	28.3	4.2	3.7	----	1.9	2.1	1.4	0.4	0.1	----	0.0	0.0
35	61.6	27.6	3.9	2.6	----	2.0	----	1.4	0.4	0.1	----	0.0	0.0
36	55.9	24.2	3.6	2.9	8.0	1.8	1.8	1.3	0.3	0.1	----	0.0	0.0
37	56.8	29.3	4.2	4.6	----	1.9	1.8	0.7	0.4	0.2	0.0	0.0	0.0
38	58.1	29.4	4.4	4.9	----	----	1.9	0.7	0.4	0.2	0.1	0.0	0.0
39	60.5	28.4	3.7	4.4	----	2.0	----	0.6	0.3	0.1	----	0.0	0.0

Table 6. Continued.

40	58.7	21.5	3.7	4.2	8.0	1.5	1.4	0.4	0.3	0.1	0.0	0.0	0.0
Mean	56.7	26.9	4.4	4.0	3.6	2.4	1.5	1.0	0.4	0.1	0.0	0.0	0.0
Max	63.3	39.8	6.8	7.1	14.3	8.3	3.1	2.5	0.9	0.3	0.1	0.0	0.1
Min	40.1	20.1	2.9	2.1	4.6	1.5	1.0	0.3	0.3	0.0	0.0	0.0	0.0

Conclusion

In order to estimate the radiation hazards resulting from a bauxite mine, it is important to determine radionuclide concentrations (^{226}Ra , ^{232}Th , ^{40}K). The method of gamma spectrometry has been used to measure the radioactivity concentration of 40 samples collected from Az Zabirah bauxite mine in Qassim Province, Saudi Arabia. From this study, the range and average values of the concentrations of ^{226}Ra , ^{232}Th , and ^{40}K were 83.7 ± 0.3 (164.2-35.2), 107.3 ± 1.3 (199.9-48.5), and 192.0 ± 1.1 (487.1-24.6) Bq/kg, respectively. Overall, the study showed that the measured values for ^{226}Ra and ^{232}Th were higher than the recommended levels. The mean value of radium equivalent and total absorbed dose rate were 251.9 Bq/kg and $111.5 \text{ nGy}\cdot\text{h}^{-1}$, respectively. The world average value of radium equivalent and absorbed dose are $370 \text{ Bq}\cdot\text{kg}^{-1}$ and $65 \text{ nGy}\cdot\text{h}^{-1}$. Annual effective gamma dose was lower than the world average. The internal and external hazard parameters in Az Zabirah were lower than the safe limit values used by UNSCEAR. The study area is a zone of high radiation levels, and it is possible to produce radiation hazards to the environment as well as the human health. However, this data may provide a general background level for the area studied and may serve as a guideline for future measurement and assessment of possible radiological risks to human health in this province.

Acknowledgements

The authors thank the Dean of Scientific Research at Qassim University for financial support under contract No. cos-2016-1-12-S-1409.

References

- CUCCIA V., DE OLIVEIRA A.H., ROCHA Z. Radionuclides in Bayer process residues: previous analysis for radiological protection. In: International nuclear atlantic conference INAC, IAEA, 24, **2011**.
- ABBADY A.G., UOSIF M., EL-TAHER A. Natural radioactivity and dose assessment for phosphate rocks from Wadi El-Mashash and El-Mahamid Mines, Egypt. *Journal of Environmental radioactivity*, **84**, 65, **2005**.
- AKINCI J. AKIN., Artir. Recep. Characterization of trace elements and radionuclides and their risk assessment in red mud. materials characterization. **59**, 417, **2008**.
- COOPER M.B. Naturally occurring radioactive materials (NORM) in Australian industries review of current inventories and future generation. Report ERS-006 (EnviroRad Services Pty. Ltd.) to the Radiation health and Safety Advisory Council **2005**.
- O'CONNOR B.H., DONOGHUE A.M., MANNING T.J., CHESSON B.J. Radiological assessment for bauxite mining and alumina refining *Annals of occupational hygiene* mes, **52**, **2012**.
- YANG QU., BIN LIAN Bioleaching of rare earth and radioactive elements from red mud using *Penicilliumtricolor* RM-10. *Bioresource Technology*, **136**, 16, **2013**.
- UNSCEAR S. Effects of Ionizing Radiation United Nations, New York, **1**, 453, **2000**.
- RIGHI S., VERITÀ S., ALBERTAZZI A., ROSSI P.L., BRUZZI L. Natural radioactivity in refractory manufacturing plants and exposure of workers to ionising radiation. *Journal of Environmental radioactivity*, **100**, 540, **2009**.
- IAEA Extent of environmental contamination by naturally occurring radioactive material (NORM) and technological options for mitigation: Internat. Atomic Energy Agency), **419**, **2003**.
- ADEMOLA J., AYOBAMI A., MICHAEL ADEKUNLE O. Evaluation of NORM and dose assessment in an aluminium industry in Nigeria World. *Journal of Nuclear Science and Technology*, **3**, 150, **2013**.
- PAPATHEODOROU G., PAPAETHYMIU H., MARATOU A., FERENTINOS G. Natural radionuclides in bauxitic tailings (red-mud) in the Gulf of Corinth, Greece. *Radioprotection*, **40**, 549, **2005**.
- YATKIN S., GERBOLES M., BOROWIAK A. Evaluation of standardless EDXRF analysis for the determination of elements on PM10 loaded filters *Atmospheric Environment*, **54** 568, **2012**.
- VINCENT P. Saudi Arabia: an environmental overview: CRC Press), **2008**.
- EL-TAHER A., ALASHRAH S. Occurrence of ^{222}Rn in irrigation water from Wadi Al-Rummah Qassim province, Saudi Arabia. In: PHYSICS AND MATERIALS SYMPOSIUM: International Conference on Applied Sciences and Industrial Technology (ICASIT2015): AIP Publishing) 020007, **2015**.
- ALASHRAH S., EL-TAHER A. Gamma Spectroscopic Analysis and Associated Radiation Hazards Parameters of Cement Used in Saudi Arabia. *Journal of Environmental Science and Technology*, **9**, 238, **2016**.
- ALASHRAH S. Radiation properties for red soil in Qassim province, Saudi Arabia. *Journal of Radiation Research and Applied Sciences*, **9**, 363, **2016**.
- EL-TAHER A., ALHARBI A. Elemental analysis of natural quartz from Um Higlig, Red Sea Aea, Egypt by instrumental neutron activation analysis. *Applied Radiation and Isotopes*, **82**, 67, **2013**.

18. EL-TAHER A., AL-ZAHRANI J.H. Radioactivity measurements and radiation dose assessments in soil of Al-Qassim region, Saudi Arabia. *Indian Journal of Pure & Applied Physics (IJPAP)*, **52**, 147, **2015**.
19. EL-TAHER A., ABDELHALIM M.A.K. Elemental analysis of limestone by instrumental neutron activation analysis. *Journal of radioanalytical and nuclear chemistry*, **299**, 1949, **2014**.
20. EL-TAHER A., ABDELHALIM M.A.K. Elemental analysis of soils from Toshki by using instrumental neutron activation analysis techniques. *Journal of radioanalytical and nuclear chemistry*, **300**, 431, **2014**.
21. EL-TAHER A., MADKOUR H. Environmental studies and radio-ecological impacts of Anthropogenic areas: shallow marine sediments Red Sea, Egypt *J Isot. Environ Health Stud*, **50**, 120, **2014**.
22. ALHARBI A., EL-TAHER A. Measurement of Natural Radioactivity and Radiation Hazard Indices for Dust Storm Samples from Qassim Region, Saudi Arabia. *Life Science Journal*, **11**, 236, **2014**.
23. ABBADY A.G., EL-ARABI A. Naturally occurring radioactive material from the aluminium industry? a case study: the Egyptian Aluminium Company, Nag Hammady, Egypt. *Journal of Radiological Protection*, **26** 415, **2006**.
24. KARAGIANNIDI T., PAPAETHYMIU H., PAPTAEODOROU G. Radioactive impact of a bauxite beneficiation plant in the Itea Gulf (Gulf of Corinth, Greece). *Journal of radioanalytical and nuclear chemistry*, **279**, 923, **2009**.
25. SOMLAI J., JOBBAGY V., KOVACS J., TARJAN S., KOVACS T. Radiological aspects of the usability of red mud as building material additive. *Journal of hazardous materials*, **150**, 541, **2008**.
26. TURHAN S., ARIKAN I., DEMIREL H., GÜNGÖR N. Radiometric analysis of raw materials and end products in the Turkish ceramics industry. *Radiation Physics and Chemistry*, **80**, 620, **2011**.
27. MERGEN A. Production of sintered high alumina refractories from Turkish bauxite ore. *British Ceramic Transactions*, **103**, 42, **2004**.
28. CHUN. HUNG. YEH., GUANGQING. ZHANG. Stepwise carbothermal reduction of bauxite ores. *International Journal of Mineral Processing*, **124**, 1, **2013**.